



TOUGH, TOUGHER, TIIGER

The Tiiger Universal Dolly **Our Most Versatile Dolly** **Packs a Big Big Punch!**

**Designed To Accommodate
Both Pad Mounted &
Pole Mounted Transformers**



THE TIIGER UNIVERSAL DOLLY


- ◆ Unique Three Wheel Design Provides An Extremely Stable Load Platform
- ◆ Easily Positioned For Loading And Unloading
- ◆ Equipped With Low Pressure Turf Tires
- ◆ Engineered With Standard Trailer Hub With Sealed Bearings
- ◆ Constructed With High Yield Steel

Your Safest And Most Effective Choice In Transformer Handling!

Typical Operating Sequence...

Pad Mount Transformers:

- ◆ Position The Dolly Over The Transformer
- ◆ Remove Necessary Strap Attachment Bolts Located On Main Frame
- ◆ Insert And Secure Attachment Bolts In Transformer Enclosure
- ◆ Remove Spreader Bar
- ◆ Lower Spreader Bar, Attach Lifting straps, Located On Main Frame, To The Attachment Bolts on The Transformer Enclosure
- ◆ Elevate The Transformer
- ◆ Attach Main Load Straps To Main Frame And Lower Transformer
- ◆ Off You Go To Site Selected
- ◆ Position Dolly Over The Pad
- ◆ Raise Transformer, Remove Main Load Straps
- ◆ Lower Transformer Onto Pad

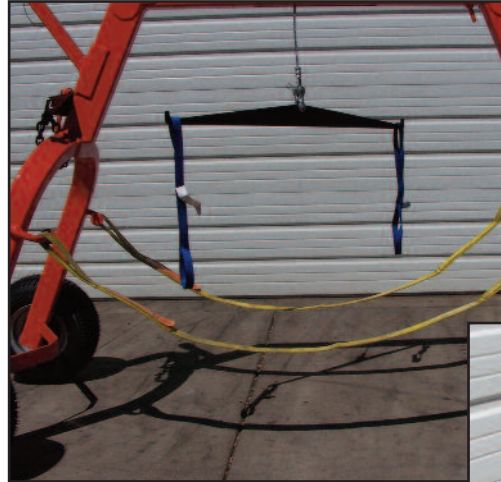

Spreader Bar Attached To Winch Line Lifting & Main Load Straps



Strap Attachment Bolts Lifting & Main Load Straps

Pole Mount Transformers:

- ◆ Remove Spreader Bar
- ◆ Re-position Winch Line To Pulley Located On The Front Of Dolly
- ◆ Remove Protective Steel Cap
- ◆ Position Winch Over Pulley And Replace Protective Steel Cap
- ◆ Attach Pole Mount Spreader Bar, Equipped With Hook Brackets
- ◆ Attach Hook Brackets To The Transformer
- ◆ Elevate The Winch
- ◆ Off You Go!



Pole Mount Set-up



Spreader Bar & Hooks



Pole Mount Ready To Go



UNIVERSAL DOLLY

Height	60	Inches
Width	40	Inches
Length	100	Inches
Weight	210	Pounds
Capacity	1000	Pounds

TIIGER, INC.

Post Office Box 2254 ◆ Mt. Juliet, TN 37121-2254

Phone: (615) 758-6046 ◆ Fax: (615) 758-6081

E-mail: dmw@tiiger.com ◆ www.tiiger.com